

DYNAMIC LUG-DRIVE FLOATING ROTOR ADAPTERS WIDE 5 and 5x5 HUBS



Wilwood engineered the innovative dynamic **Lug-Drive** mounting system for optimized braking and high-efficiency heat management on Wide 5 and 5x5 race hubs. Floating rotors provide the ultimate in high-endurance predictability for repeated high-G braking lap after lap.

The simplified lug-drive system weighs less than bobbin, or T-nut, bolt and safety wire systems, while being just as secure and effective.

FEATURES:

- Extensively tested in professional racing for more than a year
- Used on drag and road race cars for years at all levels of competition
- Snap-ring retention eliminates rotor bolts, thread lock, and safety wire; installation takes less than one minute
- Eliminates stress and thermal fatigue by isolating the expansion of the floating rotor from the hub/adaptor
- Forged aluminum adapters feature a Type-III hard anodized coating and stainless float control clips that ensure extended life to the hat assembly

LUG-DRIVE ADAPTERS:

- Lug-Drive rotor adapters available for **Starlight 55** or **Starlight 55-XD** Wide 5 hubs
- Lug-Drive adapter for 5x5.00" racing hubs

LUG-DRIVE ROTORS:

- Lug-Drive adapters keep rotors in the original factory location
- **Spec37** iron alloy rotors provide long wear, efficient cooling, and resist thermal distortion even with repeated heat cycling
- 11.75" x 0.81", GT slotted 40 straight vane, symmetrical
- 11.75" x 1.25", GT slotted 48 curved vane, directional



Lug-Drive Adapters

P/N: [300-16921](#) to Starlite 55 Wide 5 Hubs

P/N: [300-16922](#) to Starlite 55-XD Wide 5 Hubs

P/N: [300-17318](#) to 5 x 5.00" Racing Hubs




Lug-Drive **Spec37** GT Slotted Rotors

P/N: [160-16924](#) GT Slotted Rotor (R), 1.25" Wide

P/N: [160-16925](#) GT Slotted Rotor (L), 1.25" Wide

P/N: [160-16923](#) GT Slotted Rotor, 0.81" Wide

WIDE 5 STARLITE 55-XD LUG-DRIVE TYPICAL CONFIGURATION

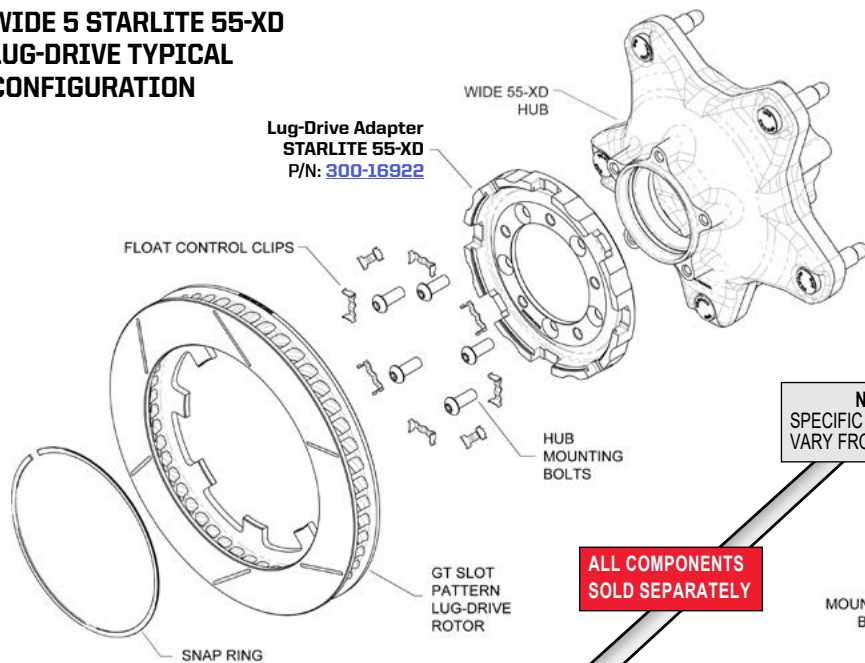


Button Head Bolt
(use with 55-XD or 5x5.00")
P/N: [230-15405](#)




Flat Head Cap Screw (8-pk)
(use with Wide 5)
P/N: [230-17419](#)

NOTE
SPECIFIC PARTS MAY
VARY FROM DIAGRAM

**ALL COMPONENTS
SOLD SEPARATELY**

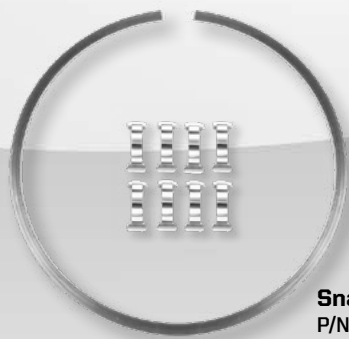

Snap Ring Kit
P/N: [300-12561](#)

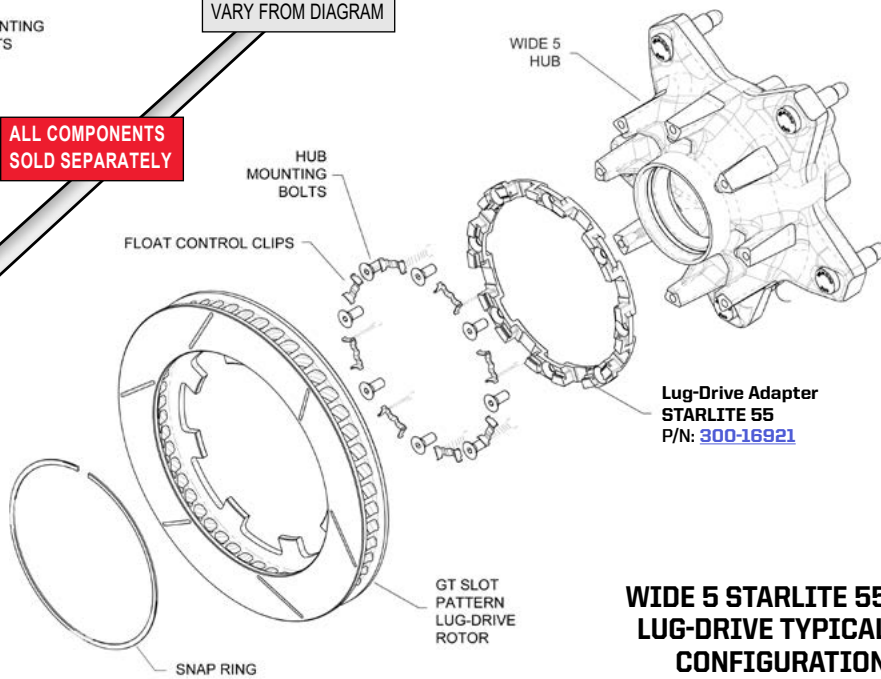

WIDE 5 STARLITE 55 LUG-DRIVE TYPICAL CONFIGURATION

ORDERING INFORMATION: PH: 805.388.1188 • FAX: 805.388.4938 • wilwood.com • info@wilwood.com

PART NUMBER	DESCRIPTION	HUB TYPE / ROTOR SIZE	MATERIAL / FINISH
300-16921	Starlite 55 Hub Lug-Drive Adapter	Wide 5	Forged Aluminum Type-III Hard Anodized
300-16922	Starlite 55-XD Hub Lug-Drive Adapter	Wide 5	Forged Aluminum Type-III Hard Anodized
300-17318	5 x 5.00" Racing Hub Lug-Drive Adapter	5 x 5.00" Racing Hub	Forged Aluminum Type-III Hard Anodized
300-12561	Snap Ring Kit with Stainless Float Control Clips		
230-17419	Flat Head Cap Screw, 5/16-18x.75" for 300-16921 (8-pk)		
230-15405	Button Head Bolt, 3/8-16x1.00" for 55-XD or 5x5.00"		
160-16923	Spec37 GT Slotted, 40 Straight Vane, Symmetrical Rotor	11.75" x .81"	Iron Alloy
160-16924	Spec37 GT Slotted, 48 Curved Vane, Right Rotor	11.75" x 1.25"	Iron Alloy
160-16925	Spec37 GT Slotted, 48 Curved Vane, Left Rotor	11.75" x 1.25"	Iron Alloy